

Type: EstaGrip[®] ST 70A TPE is a 70A Polyether-Type Thermoplastic Polyurethane.

Features: Low durometer soft feel for excellent grip; outstanding adhesion

Uses: Injection Molding - Overmolding

Physical Properties	Value (Metric)	Unit	Test Method
Hardness (5 sec)	70 +/- 3	Shore A	ASTM D-2240
Specific Gravity	1.05		ASTM D-792
Tensile Strength	3200 (22.1)	psi (MPa)	ASTM D-412
Ultimate Elongation	850	%	"
Tensile Stress at			
- 100 % Elongation	380 (2.6)	psi (MPa)	ASTM D-412
- 300 % Elongation	650 (4.5)	psi (MPa)	"
Tear Strength			
Graves	350 (6.3)	lb/in (kg/mm)	ASTM D-624 (die C)
Taber Loss (1000 rev)	0.001 (33.0)	oz (mg)	ASTM D-3389 (H18, 1000g)
T _g (by DSC)	-70 (-57)	°F (°C)	Lubrizol Advanced Materials

- Prior to testing samples were conditioned at 23°C for 48 hours.
- Based on extruded sheet (30 mils).
- Listed values are "typical (average) values" and should / can not be applied for specification purposes.

Supply Form and Standard Packaging

- EstaGrip[®] ST 70A TPE is supplied in pellet form and packaged in 50 lb bags or 1000 lb boxes.

Material Preparation

- Prior to processing, EstaGrip[®] ST 70A TPE must be dried at **220°F (104°C)** for 2-4 hours.
- It is recommended to dry the material in a desiccant type dryer. Target dew point should be **-40°C**.
- Depending on the applied processing technique, the maximum moisture level should be 0.02%.

Processing Conditions

- EstaGrip[®] ST 70A TPE can be processed on any conventional injection molding machine.

July 20, 2009

The information contained herein is believed to be reliable, but no representations, guarantees or warranties of any kind are made as to its accuracy, suitability for particular applications or the results to be obtained. The information is based on laboratory work with small-scale equipment and does not necessarily indicate end product performance. Because of the variations in methods, conditions and equipment used commercially in processing these materials, no warranties or guarantees are made as to the suitability of the products for the applications disclosed. Full-scale testing and end product performance are the responsibility of the user. Lubrizol Advanced Materials, Inc. shall not be liable for and the customer assumes all risk and liability of any use or handling of any material beyond Lubrizol Advanced Materials, Inc.'s direct control. The SELLER MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Nothing contained herein is to be considered as permission, recommendation, nor as an inducement to practice any patented invention without permission of the patent owner.

© 2009 The Lubrizol Corporation. All Rights Reserved.




Lubrizol Advanced Materials, Inc.

9911 Brecksville Road
Cleveland, OH 44141-3247
888-234-2436

www.estane.com

Recommended Starting Injection Molding Temperature Profile:

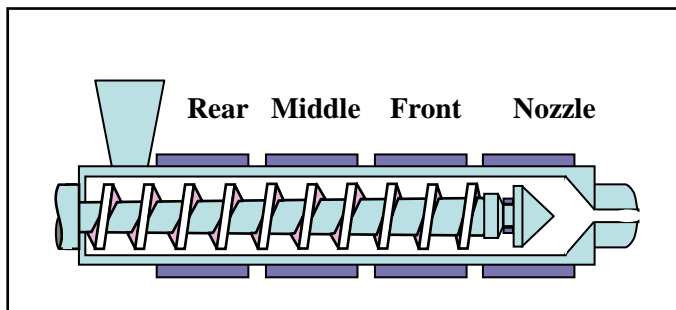

	°F/°C
Rear	425/218
Middle	430/221
Front	440/227
Nozzle	440/227
Melt Temperature*	440/227

* Melt temperature by pyrometer check of air shot

For further information refer to Lubrizol Advanced Materials processing guides