



# BIO-BASED DISPERSANT TECHNOLOGY

FOR PAINTS, COATINGS AND PRINTING INKS

## A Range of Capabilities

Solsperse™ Hyperdispersants cover a wide range of applications, including almost any combination of solid particulate being dispersed into a liquid medium.




## Proven Technology

Addressing the growing demand for raw materials that deliver sustainability benefits and reduce the environmental impact of coatings, and printing inks, Lubrizol offers a selection of dispersing agents with bio-based content designed for use in a range of applications. They are fully or partially based on raw materials from plant-based sources, which decrease the consumption of fossil resources and help improve the carbon footprint of coatings and inks without sacrificing performance. We continue to develop our range of bio-based dispersing agents, so please contact us to discuss latest status and availability and hear about the specific properties of new grades.

## Features & Benefits

- Highly efficient dispersion of pigment & fillers
- Effective in formulating low viscosity high solids coatings
- Tailored technology solutions
- Easy incorporation
- Faster processing
- Improved dispersion and flow characteristics
- Superior performance

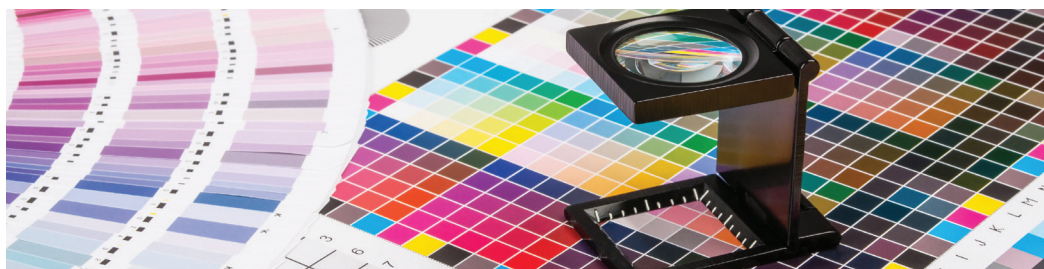

## Bio-Based Dispersing Agents

DISPERSING AGENTS					
Product Name	Active Content	Carrier Solvent	% Bio-Based Content of Active Solids	Recommendation by Market Segment	
				Paints & Coatings	Printing Inks
Solsperse™ 17000	100%		≥99	•	•
Solsperse™ 3000	100%		≥99	•	•
Solsperse™ 21000	100%		≥99	•	
Solsperse™ 9000	100%		≥95	•	
Solsperse™ 8000	100%		90-95	•	
Solsperse™ 16000	100%		90-95	•	•
Solsperse™ 17940	40%	Aliphatic Distillate	90-95	•	•
Solsperse™ 11200	50%	D40 Aliphatic	90-95	•	
Solsperse™ 19000	100%		90-95	•	•
Solsperse™ 13300	50%	D40 Aliphatic	75-80	•	
Solsperse™ 28000	100%		70-75	•	
Solsperse™ 13940	40%	Aliphatic Distillate	60-65	•	•
Solsperse™ 29000	100%		50-55	•	•
Solsperse™ 38500	40%	PM Acetate	35-40	•	
Solsperse™ M385	50%	PM Acetate	35-40	•	
Solsperse™ M386	50%	Aromatic 100	35-40	•	
Solsperse™ 86000	100%		30-35	•	•

# Lubrizol

The information contained herein is believed to be reliable, but no representations, guarantees or warranties of any kind are made as to its accuracy, suitability for particular applications or the results to be obtained. The information is based on laboratory work with small-scale equipment and does not necessarily indicate end product performance. Because of the variations in methods, conditions and equipment used commercially in processing these materials, no warranties or guarantees are made as to the suitability of the products for the applications disclosed. Full-scale testing and end product performance are the responsibility of the user. Lubrizol Advanced Materials, Inc. shall not be liable for and the customer assumes all risk and liability of any use or handling of any material beyond Lubrizol Advanced Materials, Inc.'s direct control. The SELLER MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Nothing contained herein is to be considered as permission, recommendation, nor as an inducement to practice any patented invention without permission of the patent owner.

Product safety information required for safe use is not included. BEFORE HANDLING, READ PRODUCT AND SAFETY DATA SHEETS AND CONTAINER LABELS FOR SAFE USE, PHYSICAL AND HEALTH HAZARD INFORMATION. THE SAFETY DATA SHEET IS AVAILABLE FROM YOUR LUBRIZOL REPRESENTATIVE, OR DISTRIBUTOR.