

INNOVATIVE ESTANE® AND PEARLTHANE™ SOLUTIONS FOR SEALS AND GASKETS



**ADVANCING MATERIALS. ELEVATING PERFORMANCE.** 



## **A HISTORY OF INNOVATION**

The Lubrizol Corporation, a Berkshire Hathaway company, is an innovative specialty chemical company that produces and supplies consumer electronics markets. With over 60 years of experience, Lubrizol is a global leader in engineered polymer technologies and meet the requirements of demanding applications such as seals and gaskets, cables, belting, tubes, adhesives, films and diverse represents multiple product groups [both aliphatic and aromatic, polycaprolactone (PCL) copolyester, polyester, polycarbonate, polyether and copolymer-based] working together to form a single, toughest application challenges

### **UNMATCHED BENEFITS**

Combining the ESTANE® and Pearlthane™ TPU portfolios with other engineered polymer innovations, Lubrizol now represents a single, convenient and reliable source with multiple product groups.

Working together with the customer, Lubrizol helps solve some of today's toughest challenges within the seals and gaskets applications that need to withstand extreme temperatures and physical wear and tear.

In order to meet rigorous standards for maintaining their durability and life expectancy, seals and gaskets must be formulated with the highest quality materials available. Through their outstanding performance and mechanical properties, ESTANE® and Pearlthane™ TPUs meet and exceed these application requirements. With one of the lowest compression sets in their materials class, these resins are ideal for use in hydraulic seals and gaskets applications.

Using the specialty high-performance "H" technology for high pressure hydraulic seals, Pearlthane™ PCL copolyester-based TPUs, such as **Pearlthane D11H92S** and **Pearlthane D11H95S**, feature high wear resistance, outstanding low compression set values and good flow properties. These TPU grades, especially developed for manufacturing hydraulic seals, are recommended for injection-moulding applications with an extremely short cycle time.

	Hardness Shore ISO 868	Specific Gravity ISO 2781	Tensile Strength ISO 527	Abrasion loss ISO 4649	Compression set % ASTM 395B					Tg (DSC) ISO 11357- 2°C
	A/D	g/cm <sup>3</sup>	N/mm <sup>2</sup>	mm <sup>3</sup>	70h@100°C	70h@70°C	70h@23ºC	22h@70°C	3h@130°C	20
Pearlthane <sup>™</sup> D11H92S	92 A	1.15	46	27	39	_	13	19	23	-42
Pearlthane <sup>™</sup> D11H95S	94 A	1.18	52	29	36	_	18	23	20	-37
Pearlthane <sup>™</sup> 11H94	95 A	1.18	42	35	60	40	_	32	48	-39
Pearlthane <sup>™</sup> 11T60D	58 D	1.19	41	24	54	44	34	42	61	-24
ESTANE® 58280 NAT 065*	75 A	1.06	29	30	48	36	22	29	44	-67
ESTANE <sup>®</sup> 58149 NAT 022	96 A	1.21	26	38	32	27	17	23	27	-39


Test samples were postcured for 16 hours at 120°C \* polyether-based TPU

#### **KEY PERFORMANCE FEATURES** OF ESTANE<sup>®</sup> AND PEARLTHANE<sup>™</sup> TPUS:

- Superior performance in environments with high pressure and temperature
- Very low compression set
- Excellent oil and hydraulic fuel resistance and abrasion resistance
- Higher productivity grades
- Resist severe shock
- Withstand momentary pressure spikes
- High performance even in contact with aggressive fluids (or other stringent conditions)

Figure 1: Pearlthane <sup>™</sup> TPUs	60 —	
Compression Set Values	50 —	
	set (%) — 04	
Standard TPU	— 00 Compression 20 —	
Market Reference Pearlthane <sup>™</sup> D11H95S Pearlthane <sup>™</sup> D11H92S	0 10 —	
Peantnane DTTT325	0 —	
		70h 10



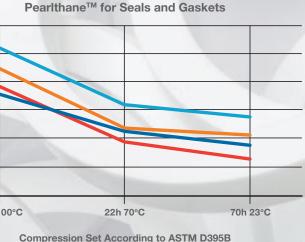

## LUBRIZOL GLOBAL PRESENCE

Our global presence means we have the application and development laboratories (with technical service ability) already in place, as well as worldwide production capabilities and renowned customer service. We are also a specialty producer of performance coatings and other unique products for apparel. Teaming with Lubrizol simplifies a complex global supply chain.

#### Americas


Lubrizol Advanced Materials, Inc. 9911 Brecksville Road Cleveland, Ohio 44141 3201 USA Phone: +1 888 234 2436

#### Asia

Lubrizol Specialty Chemicals Shanghai) Co., Ltd. 6F - No.3, Building C, Lane 227 Dongyu Road, Shanghai PRC 200126 Phone: +86 21 3866 0422

### Europe, Middle East, India & Africa

Gran Vial, no. 17 3ran Vial, no. 17 38160 Montmeló (Barcelona) Spain 2hone: +34 93 579 9522

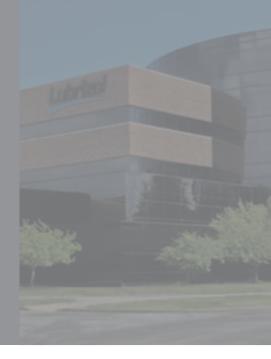



To learn more, contact us at **engineeredpolymers@lubrizol.com** or visit **www.lubrizol.com/Engineered-Polymers** 

The SELLER MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Nothing contained herein is to be considered as permission, recommendation, nor as an inducement to practice any patented invention without permission of the patent owner.



# contact us at http://go.lubrizol.com/EP

